


Hazard Zone to Work Zone in 8 Minutes.

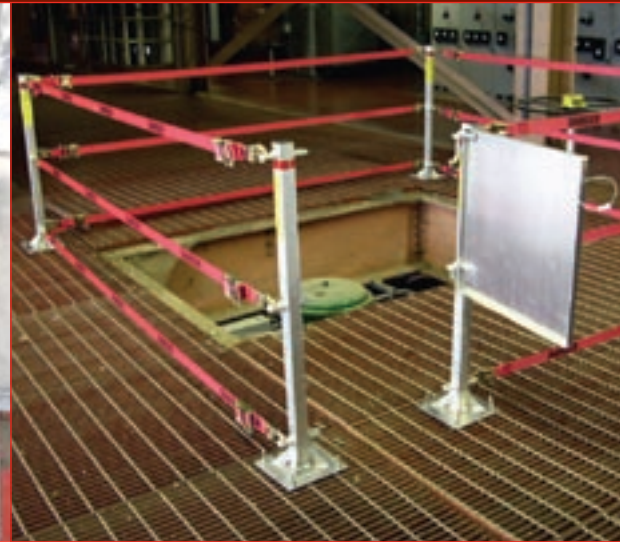

**DON'T RELY ON
"HOMEMADE" FIXES.**

Good to know:

- Design exceeds CFR 1910 and 1926 standards
- Compact size: transport by helicopter and store under bunk
- Easy, one-person assembly means less downtime
- Each unit expandable/retractable from 18 inches to 10 feet
- More cost-effective and simpler than a custom job – and reusable

INTRODUCING THE NEW temporary barricade system

(U.S. PATENT PENDING)

INCREASE SAFETY WHILE REDUCING DOWNTIME


If you can tighten eight bolts, you can install this barricade in eight minutes – safely from the deck on which you're standing. Offered only by the safety innovators at FSS, the Temporary Barricade System is a no-weld solution with practically no downtime. Once installed, you'll appreciate the barricade's portable, reusable and strong design – its nylon straps are anchored by aluminum posts that have endured horizontal deflection testing to 980 lbs.

The temporary barricade system can span missing handrail sections, open holes, hazards, stairways – even the Plus 10 Deck – sharply reducing the chance of injuries or infractions, while saving time and money.




FSS is the sole distributor of the Temporary Barricade System

OPTION A: HORIZONTAL STRAPS ONLY

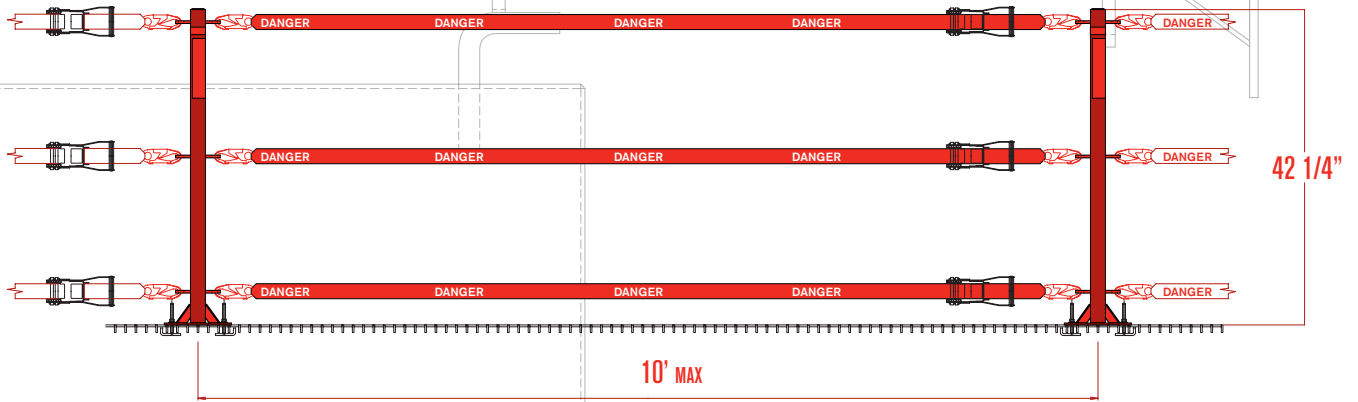

OPTION B: HORIZONTAL & VERTICAL STRAPS

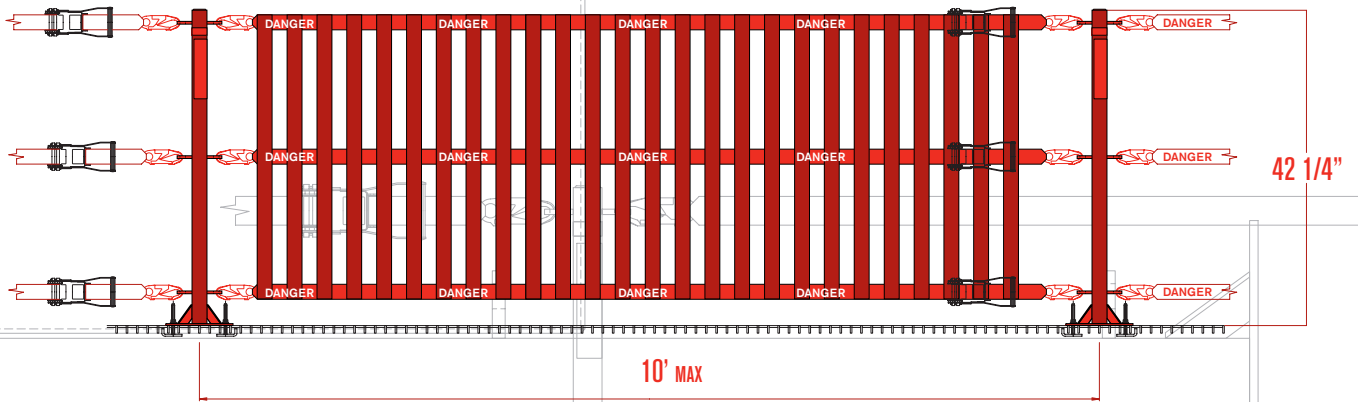

TEMPORARY BARRICADE SYSTEM

Posts are made of 1/4" x 2" x 2" 6061 T6 aluminum square tubing

Base is 1/4" x 9" x 9" aluminum plate of the same alloy as above

Pad eyes are 1/4" x 1-1/2" x 2" of the same alloy

Horizontal straps are 2" x 10' poly and have a tear strength of 5,000 lbs.

All mounting hardware is stainless steel

Double action safety hooks are rated to 5,000 lbs.

Ratchet assembly is rated to 4,000 lbs.

All welds are continuous seal welded with 5056 aluminum wire

PO Box 60639
Lafayette, La 70596
7701 Johnston Street
Maurice, La 70555
337-993-9377 (Office)
337-216-9792 (Fax)
www.teamfss.com



FSS is the sole distributor of the Temporary Barricade System